

CTY-E


- Ideal choice for manual transport and lifting goods.
- Made of C steel and with different mast options (1600, 2000, 2500, 3000, 3500 mm) and loading capacities (500, 1000,1500,2000,3000 kg)



● For Mast: made of high quality C shape steel, 1T model uses 5mm C steel ; 1.5, 2T and 3T model use 6mm C steel, (8mm C steel for 3.5meters model), to ensure loading capacity.



● For Forks: length 1150mm, are made of high-quality steel plates. Outer and inner reinforcement to ensure strong load capacity and durability.



● Operation design: Both handle control and foot control to increase operator efficiency




● Foot Brake design: ensure stability while loading
Foot protection design: Prevent wheels from pressing against feet during movement

CTY-E 1000/2000/3000 Kg Singel Mast




Model	Unit	CTY-E10-16	CTY-E20-16	CTY-E30-16
Max. load capacity	kg	1000	2000	3000
Max. lifting height	mm	1600	1600	1600
Min. height of fork	mm	90	90	90
Load center	mm	500	500	500
Overall Length	mm	1650	1670	1690
Overall Width	mm	754	754	804
Overall Height,mast lowered	mm	1960	2020	2020
Overall Height,mast extended	mm	1960	2020	2020
Forks Type	mm	Adjustable	Adjustable	Adjustable
Fork Dimensions(L*W*H)	mm	1150*150*60	1150*150*60	1150*150*60
Forks Outside Width	mm	320-720	320-720	320-750
Leg Length	mm	920	900	880
Wheel Type		Nylon/PU	Nylon/PU	Nylon/PU
Tyre Size,Drive	mm	Φ180*50	Φ180*50	Φ180*50
Tyre Size,Load	mm	Φ80x60	Φ80x70	Φ80x90
Net Weight	kg	165/169	214/218	244/248

CTY-E 1000Kg Double Mast

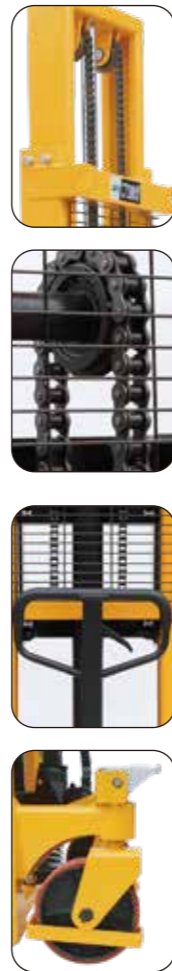

Model	Unit	CTY-E10-20	CTY-E10-25	CTY-E10-30	CTY-E10-35
Max. load capacity	kg	1000	1000	1000	1000
Max. lifting height	mm	2000	2500	3000	3500
Min. height of fork	mm	90	90	90	90
Load center	mm	500	500	500	500
Overall Length	mm	1670	1670	1670	1670
Overall Width	mm	804	804	804	804
Overall Height,mast lowered	mm	1550	1800	2050	2300
Overall Height,mast extended	mm	2530	3030	3530	4030
Forks Type	mm	Adjustable	Adjustable	Adjustable	Adjustable
Fork Dimensions(L*W*H)	mm	1150*150*60	1150*150*60	1150*150*60	1150*150*60
Forks Outside Width	mm	320-750	320-750	320-750	320-750
Leg Length	mm	920	920	920	920
Wheel Type		Nylon/PU	Nylon/PU	Nylon/PU	Nylon/PU
Tyre Size,Drive	mm	Φ180*50	Φ180*50	Φ180*50	Φ180*50
Tyre Size,Load	mm	Φ80x60	Φ80x60	Φ80x60	Φ80x60
Net Weight	kg	214/218	240/244	266/270	282/286

CTY-E 2000Kg Double Mast

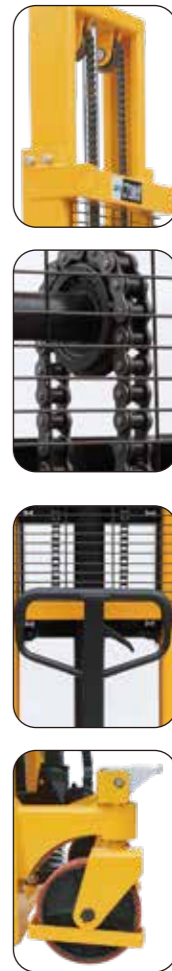

Model	Unit	CTY-E20-20	CTY-E20-25	CTY-E20-30	CTY-E20-35
Max. load capacity	kg	2000	2000	2000	2000
Max. lifting height	mm	2000	2500	3000	3500
Min. height of fork	mm	90	90	90	90
Load center	mm	500	500	500	500
Overall Length	mm	1690	1690	1690	1690
Overall Width	mm	804	804	804	804
Overall Height,mast lowered	mm	1550	1800	2050	2300
Overall Height,mast extended	mm	2530	3030	3530	4030
Forks Type	mm	Adjustable	Adjustable	Adjustable	Adjustable
Fork Dimensions(L*W*H)	mm	1150*150*60	1150*150*60	1150*150*60	1150*150*60
Forks Outside Width	mm	320-750	320-750	320-750	320-750
Leg Length	mm	900	900	900	900
Wheel Type		Nylon/PU	Nylon/PU	Nylon/PU	Nylon/PU
Tyre Size,Drive	mm	Φ180*50	Φ180*50	Φ180*50	Φ180*50
Tyre Size,Load	mm	Φ80x70	Φ80x70	Φ80x70	Φ80x70
Net Weight	kg	266/270	284/288	303/307	321/325